


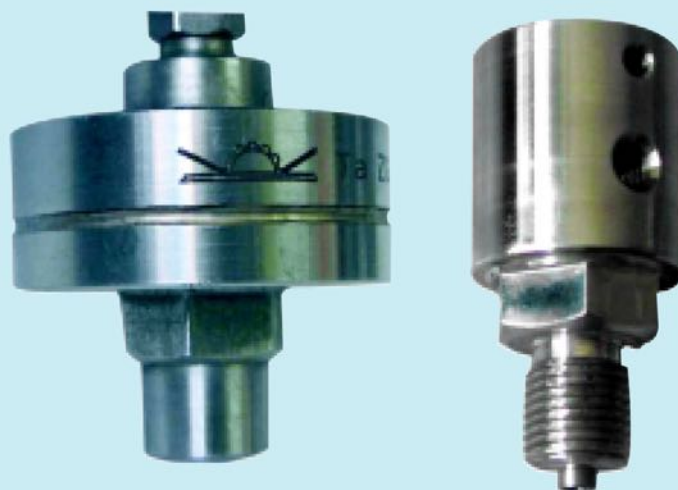

Special items

- High temperature: Max 200℃
- Diaphragm material: Hastelloy B, Hastelloy C, Tantalum, Titanium, Monel 316L
- PTEE coated
- Body material: 321, 304, 316L
- Connection: other on request
- Filling liquid: As different media, optional fluorocarbon oil, -60-+120℃, Food oil -20-+200℃

Specifications

Range: FMH 0-10/0-40MPa

FMM 0-1/0-10MPa

FMS: -1-0/0-0.6MPa

Accuracy: (add to instrument accuracy) $\pm 0.5\%$ for
direct mounting; $\pm 1\%$ for dampeners
over pressure protector, distance
transmission and so on.

Working Temperature: -45-+150℃


Diaphragm Material: 316L

Body material: 316

Connection: Thread M20*1.5, 1/2" NPT

Filling liquid: Silicone oil

DIMENSIONS (mm)

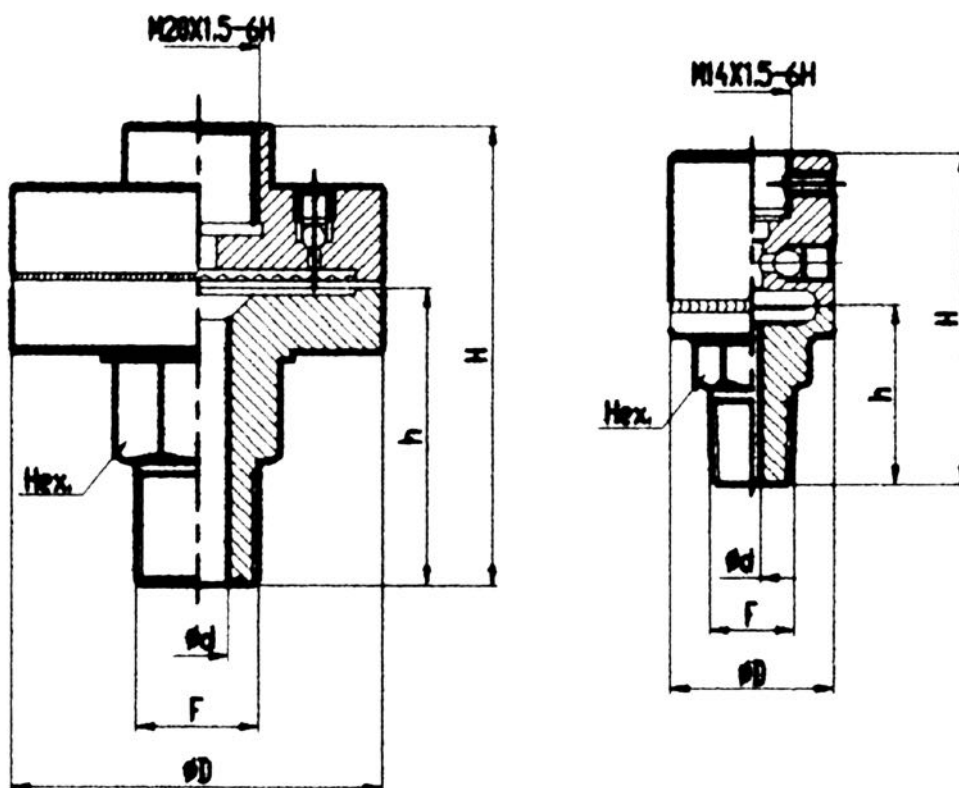

D	Φ dM	F	d	Hex.	h	H
67.5	56	M20x1.5/.../G1/2"	10	24	50	75
60	49	M20x1.5/.../G1/2"	6	24	50	75
44	36	M14x1.5/.../G1/4"	6	24	50	75

D	Φ dM	F	Hex.	h	H
27	19	M20x1.5	27	27	52
27	19	NPT1/2"	27	29	54
27	19	G1/4"	19	31	56